



PrimeLINE®

United Technologies

*The PrimeLINE® unit runs green.
And keeps you in the black.*




PrimeLINE®

For the best in product expertise and service support, count on Carrier.

The best of both: lower operating costs and emissions.



R-134a proves that less is more.

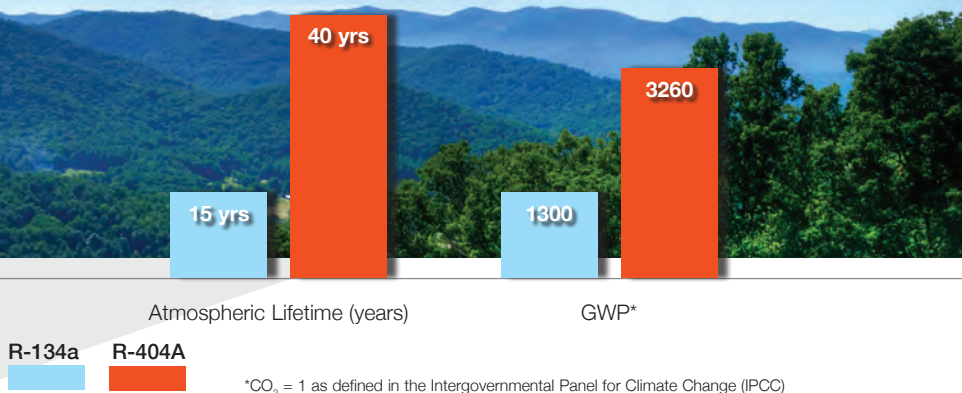

Best-in-class efficiency and life-cycle cost.

- The PrimeLINE unit answers rising energy fuel costs with superior efficiency.
- Faster pulldown – vapor injection system starts compressor cycling sooner, minimizing power consumption.
- Time-tested Carrier reliability means lower maintenance costs.
- Significantly decreases life-cycle costs by reducing energy use and maintenance costs.

The environmental advantages.

- Improved efficiency reduces power draw, which reduces CO₂ emissions.
- For minimal environmental impact, R-134a has a significantly lower atmospheric life and GWP than R-404A.
- Engineered to provide highest deep frozen capacity with R-134a.


*Copeland Scroll Digital® is a registered trademark of Emerson Climate Technologies, Inc.

Optimized to take efficiency to new highs and environmental impact to new lows.



The PrimeLINE unit's compressor features Copeland Scroll Digital®* technology and includes:

- Highest efficiency in container applications.
- Digital modulation (unloading) minimizes energy usage.
- Vapor injection system delivers more cooling capacity.
- Aluminized coating for maximum corrosion protection.

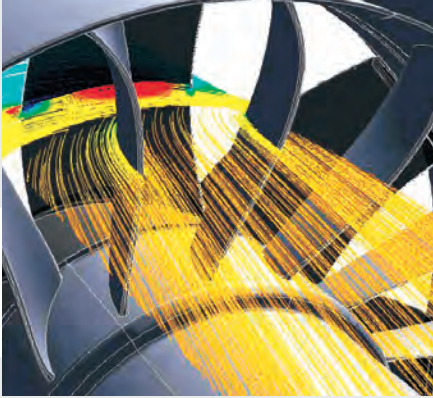

- The PrimeLINE® unit features an exclusive evaporator fan, stator, and 3-phase motor.
- Optimized assembly reduces power consumption, not airflow.
- Aero modeling reduces friction and resistance across the fan blade, improving efficiency.
- Aerospace-inspired fan engineered and built in partnership with Carrier's parent company, United Technologies.




- Electronic expansion valve helps attain deep frozen capacity and stable temperature control.
- PrimeLINE units provide enhanced dehumidification control (down to 50% relative humidity) over a wide range of operating temperatures with no compromise to energy efficiency.



- Micro-Link® 3 controller delivers the same reliability, interchangeability, and accuracy field-proven in our industry-leading ThinLINE® platforms.



- Patented, electrostatically coated copper formed condenser coil for superior corrosion protection.
- Coil size increased for higher cooling capacity.

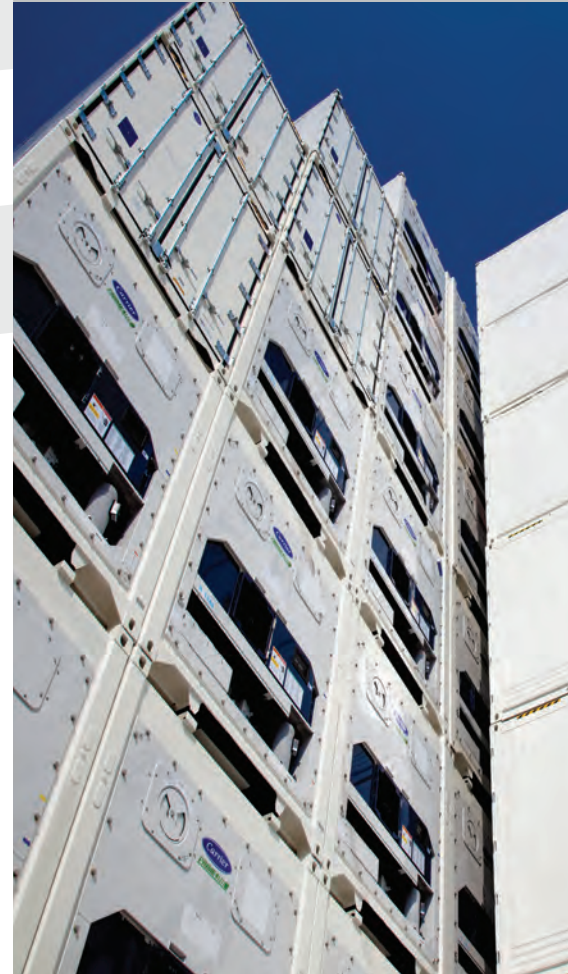

Superior support for all Carrier products.

PrimeLINE is supported by the most extensive network of expert service engineers and global access to parts.

Carrier is the worldwide expert in container products and support, with more units in operation today than all others combined. Trust Carrier for best-in-class performance, quality, and service.

PERFORMANCE SPECIFICATIONS

PrimeLINE®



Cooling Capacity: Ambient @ 38°C (100°F) with Exclusive HFC-134a Digital Scroll Compressor

Temperature	Watts	Btu/hr
2°C (35°F)	12,000	40,900
-18°C (0°F)	6,600	22,500
-29°C (-20°F)	4,400	15,000

Specifications are subject to change without notice.

Standard Features:

Refrigeration System

- Exclusive HFC-134a digital scroll compressor
- Zero ODP HFC-134a
- Digital capacity unloading
- High-efficiency evaporator and formed condenser coils
- Electrostatically coated all-copper condenser coil
- High-efficiency vane-axial evaporator fans
- Three-phase condenser and dual-speed evaporator fan motors
- Electronic expansion valve
- Refrigerant receiver with sight glass, Al coated steel for superior corrosion protection
- ATO (Sprenger)-accepted adjustable fresh-air exchange

Electrical System

- Wired for 380/460 volt 3ph 50/60 Hz power
- Safe, 24-volt AC control circuit with fuse protection
- 18m (60 ft) power cable with attached CEE-17 plug
- Electric heat
- Main power circuit breaker

Control System

- Micro-Link® 3 modular controller with dual sensors
- DataCorder™ electronic data recorder
- Backlit LCD display
- Energy-saving Economy Mode evaporator motor logic
- Pressure-limiting feature
- Cool, Heat, Defrost, In-Range, Alarm indicator lights
- Selectable timed electric defrost (3-/6-/9-/12-/24-hour settings) or automatic defrost
- Manual defrost initiation
- Time-delay motor start sequence
- Current-limiting feature
- Interrogator plug
- Suction and discharge temperature sensors
- Suction and discharge pressure transducers

Convenience Features

- Removable front service panels
- Forklift pockets
- TIR compliant

Provisions

- Water-cooled condenser
- Dual-voltage transformer
- Fresh-air vent position sensor

Accessories and Options:

- USDA cold-treatment recording package
- Rechargeable power-up battery pack
- Dual-voltage transformer module
- Electronic power line communication module (RMU)
- Remote monitoring receptacle (ISO 4-wire)
- Water-cooled condenser system
- Dehumidification control
- Low-position air-exchange control
- Fresh-air vent position sensor
- eAutofresh™ on-demand ventilation
- QUEST power-saving mode
- Hinged rear bulkhead panel with quick-release fasteners
- Thermometer insertion ports (supply/return air)
- LED display
- Convenience handles
 - Center
 - Left
- Rain gutters (bolted or riveted)
- Voltage shields
- Special control modes
 - Bulb
 - ACT / ASC
- Nitrogen ports
- Interrogator plug location inside control box
- Tranfresh module
- Secure rechargeable battery
- Certification: ABS, BV, KRS, GL
- CE marking

The Americas

Carrier Transicold
Container Products Group
1095 Cranbury S. River Road
Suite 23
Jamesburg, NJ 08831 USA
Tel: +1-609-655-7605
Fax: +1-609-655-3595

Europe/Middle East/ Africa/Russia

Carrier Transicold
Container Products B.V.
Pittsburghstraat 21
3047 BL Rotterdam
The Netherlands
Tel: +31-10-2380100
Fax: +31-10-2380142

Asia/Pacific

Carrier Transicold
Pte. Ltd.
251 Jalan Ahmad
Ibrahim
Singapore 629146
Tel: +65-6213-6388
Fax: +65-6862-5309

Asia/Pacific

Carrier Transicold
Container Products Ltd.
Unit 01, 16/F,
Global Gateway (HK)
168 Yeung Uk Road
Tsuen Wan, N.T.
Hong Kong
Tel: +852-288-00389
Fax: +852-288-00314

Japan

Carrier Transicold
Container Products Ltd.
Residia Tower
Roppongi 1201
6-18, Roppongi 7-chome,
Minato-ku
Japan
Tel: +81-3-5772-3668
Fax: +81-3-5772-3669

Australia

Carrier Transicold
Australia Ltd.
5 Hill Road
Wentworth Point
NSW 2127
Sydney, Australia
Tel: +61-2-9648-6100
Fax: +61-2-9648-6101

Carrier Transicold
Container Products Group
P.O. Box 4805
Syracuse, NY 13221 USA

www.carrier.com/container

